



Efficient fitting of nanofiltration model parameters for a specified groundwater type by selecting suitable characterization data-sets

Irene Fernández-Fernández, José M. Gozávez-Zafrilla*, Asunción Santafé-Moros

Institute for Industrial, Radiophysical and Environmental Safety (ISIRYM), Universitat Politècnica de Valencia, C/ Camino de Vera s/n, 46022 Valencia, Spain, Tel. +34 96 387 76 33; emails: jmgz@iqn.upv.es, assanmo@iqn.upv.es (J.M. Gozávez-Zafrilla)

Received 31 March 2014; Accepted 16 June 2014

ABSTRACT

Nanofiltration (NF) models can be useful to perform optimal designs of membrane systems and to estimate membrane performance for waters. There is a special interest in obtaining NF models with parameters based on measurable properties of the membrane and independent from the feed and operating conditions. However, many times, from a practical point of view, NF parameters can be directly fitted from experiments performed with salts in a range of compositions. The aim of this study is to select the better combination of experiments to yield a suitable fitting for the NF model Donnan steric-partitioning pore model with dielectric exclusion (DSPM-DE). In our case, the best fitting for a specific group of waters is searched (groundwater belonging to a Mediterranean region with moderate salinity). The first part of the work is devoted to study which combinations of salts and concentrations lead to higher information. Using known values of NF parameters, permselective results were computationally generated using the NF model for a huge number of different combinations of compositions and random parameter sets. Performance factors for permeate flux and rejection based on the comparison between the characterization groups and a control group were defined. The second part of the work focused on the experimental validation of the selection procedure. The results showed that there are characterization sets (composition and operating conditions) that yield higher fitting performance. These combinations of experiments should be the preferred ones, when direct fitting from experiments is going to be performed.

Keywords: Nanofiltration; DSPM-DE model; Model fitting

1. Introduction

Nanofiltration (NF) has shown its effectiveness on the ion removal from water, being an effective technique for the treatment of brackish waters to obtain

drinking water or reuse industrial wastewater. To develop NF processes, the knowledge of factors affecting the separation is essential but obtaining precise and reliable experimental data is a long and resource intensive process. The development of NF models is fundamental to facilitate this knowledge. Besides, the

*Corresponding author.

Presented at the Conference on Desalination for the Environment: Clean Water and Energy 11–15 May 2014, Limassol, Cyprus

developed NF models can be a useful tool for design and operation of NF systems.

Several attempts have been performed for modeling NF separation processes during the last decades. The most successful models are those derived from the Donnan steric-partitioning pore model (DSPM) developed by Bowen and Mukhtar [1]. These models use the extended Nernst-Planck equation to describe ionic transport across the membrane. Afterwards, the model was updated by Bowen and Welfoot [2] including dielectric exclusion, the dependence of chemical potential on pressure on solute transport, and an increased solvent viscosity within the pores Donnan steric-partitioning pore model with dielectric exclusion (DSPM-DE).

This model considers four characteristic parameters of the membrane: membrane pore size (r_p), the ratio of membrane thickness to effective porosity ($\Delta x/A_k$), the membrane charge density (χ_d), and the dielectric constant of the membrane (ε). The pore size of the membrane can be determined directly by liquid–liquid porosimetry or atomic force microscopy [3], or indirectly by NF of uncharged solutes [4]. Then, the $\Delta x/A_k$ parameter can be calculated with Eq. (1) with the value of permeability to pure water ($L_{p,w}$) obtained with experiments carried out at various transmembrane pressures. The membrane charge density is very influenced by feed composition (C_T), so it is usually correlated using a potential function (Eq. (2)). Also, these parameters could be obtained directly using a fitting procedure of the DSPM-DE model to experimental data.

$$L_{p,w} = \frac{r_p^2}{8 \cdot \mu \cdot \Delta x/A_k} \quad (1)$$

$$\chi_d = \chi_{dq} \cdot C_T^{\gamma_{ds}} \quad (2)$$

However, NF parameters are not completely independent from composition [5]. This implies the convenience of using, in the fitting procedure, model solutions with composition as similar as possible to the waters that will be treated by the membrane. Another issue that must be taken into account is the determination of the right experiments to be used in the fitting procedure of the parameters. The determination of the best combinations of experiments for a specific type of waters would constitute a significant improvement of the quality of the further model predictions.

The aim of this work is to find an optimal set of experiments to fit the model in order to obtain the best predictions in a given range of water compositions.

An optimal set of experiments is a subset with a number of experiments not too time-consuming and with not too complex feed compositions. Additionally, the model parameters obtained from the optimal subset must be representative of the water type on which the model will be applied.

To illustrate the procedure, a specific type of natural groundwater present in a Mediterranean region of Spain (Valencian Community) was selected as universe of study. According to the information collected in [6], these waters are characterized by low-salinity levels between 500 and 1,500 mg/L. Major ions are calcium, sulfate, chloride, and bicarbonate. These waters have nitrate levels that slightly exceed the legal limit (50 mg/L), which can be treated using NF, a potential technique to treat them to obtain drinking water. Moreover, coming from diverse rocks, the concentrations of some ions are slightly correlated. A classic experimental design does not take into account this correlation between ion compositions; therefore, a better approach would be to perform random experiments in the composition range of interest.

The most direct approach to perform the selection of the best combinations of experiments intended for fitting would be to compare the real performance of the membrane for the brackish waters group with the model predictions corresponding to parameters fitted from different groups of characterization experiments. So, the NF of a representative set of the universe of natural brackish waters studied would be performed experimentally, obtaining total rejection and permeate flux data. Afterwards, a large number of experimental sets with different feed compositions would be chosen to be tested under the same operating conditions in order to obtain different parameter sets. Finally, each set of parameters would be used to simulate the NF of natural waters and the obtained results would be compared with the experimental ones to evaluate the corresponding error.

However, the latter procedure implies a large number of experiments, so it was decided to carry out a preliminary study using simulation and, then, to check the obtained results in a posterior experimental phase.

Besides, as the fitting process takes much more time than the calculation procedure, a method using direct evaluation is proposed. The method is based on the use of two different types of groups that are representative of the universe of waters to be studied:

- The control group formed by randomly sampled waters from the universe of study.
- The characterization group, any of the combinations of fitting experiments to be assessed.

It is assumed that a good group of fitting experiments will properly predict the control group, if the variations of the model parameters equally affect both groups. Therefore, the model parameters will be varied in a range and the sensitivity to the parameters change of both groups will be evaluated.

For the conclusions drawn from the comparison to have validity, it is essential that the items assigned to both groups be representative of the universe of study.

This paper is structured as follows: first, the calculation tool used to fit the DSPM-DE model and to simulate the NF performance is described. Then, the correlation between the control group and different characterization groups is explained and the characterization group that better predicts the total rejection of the control group is detailed. Finally, the results of the experimental testing of this characterization group with a validation case are exposed.

2. Methodology

2.1. Calculation tool

Calculations with the DSPM-DE model were performed using a code implemented in MATLAB. The mentioned program has two different operation modes: calculation and fitting.

The calculation mode is used to simulate the NF performance for given values of r_p , $\Delta x/A_k$, χ_{dq} , χ_{ds} , and ε . The permeability of pure water and the thickness of the boundary layer can be included as additional parameters. In calculation mode, feed molar composition and operating conditions (pressure, temperature, cross-flow velocity, and feed pH) must be specified. The program returns the composition and volumetric flux of the permeate stream. It is also possible to estimate the pressure required to obtain a specified permeate flux.

The fitting mode is used to obtain the model parameters from a set of experimental NF data. In this mode, besides feed molar composition and operating conditions, the volumetric flux and ion concentration of the permeate stream must be introduced. With an initial value introduced for each parameter, a genetic algorithm is used to perform a global optimization of the parameters followed by a local optimization using a gradient-based method. Required computational parameters of the algorithm are the number of generations, population size, mutation rate, and crossover.

2.2. Selection of the optimal group of experiments for fitting

In order to select the best set of cases which leads to an optimal prediction of the filtration behavior of a

membrane, the simulation results of the model for two types of groups were compared:

- The control group was formed by randomly sampling 58 waters from the universe of study.
- The different characterization groups were selected combinations of salt solutions of variable complexity, different concentrations, and experimental conditions; also meeting these requirements: (i) the composition of experiments performed must have limited complexity; and (ii) the range of composition of the solutions used must fall in the composition range of the universe of waters of study.

According to Wilks' formula [7], the number of Monte Carlo runs to perform an uncertainty and sensitivity study in order to get a probability content of 0.95 at a confidence level of 0.95 is 93. Therefore, 93 random combinations of the model parameters were performed. To do that, values of the parameters were independently generated using uniform probability distributions functions around a reference value. According to previous data for commercial NF membranes in Table 1, the selected range for each of the 93 sets of model parameters is shown in Table 2. The $\Delta x/A_k$ values were calculated with Eq. (1), based on those of the pore radius and water permeability. The values of the coefficients of Eq. (2) for the charge density were taken to obtain typical charge values according to the total concentrations used in the simulation (between 13 and 42 mN).

The complete procedure is schematized in Fig. 1.

In the definition of the control group compositions, only major ions were taken into account, that is, Ca^{2+} , Mg^{2+} , Na^+ , K^+ , Cl^- , NO_3^- , HCO_3^- , SO_4^{2-} and CO_3^{2-} . The concentration ranges for each type of ion are shown in Table 3. Three operating pressures of 5, 10, and 15 bar were considered as representative of the typical pressure range for the NF of the waters. Temperature, cross-flow velocity, and pH were fixed at 25°C, 2 m/s, and 6, respectively.

For the sake of simplicity, the characterization groups were formed considering solutions constituted by only four different ions: Cl^- and Na^+ were chosen as representative monovalent ions, and Mg^{2+} and SO_4^{2-} were chosen as representative divalent ions, because of their important presence in the natural brackish waters studied. The Ca^{2+} cation was discarded to avoid potential scaling problems in the experimental tests. Two levels of total feed concentration were fixed: 13 and 42 mN, corresponding to the maximum and minimum values of the control group. The operating pressure was established at two levels

Table 1
Characteristic parameters of different commercial membranes in literature

Membrane	r_p (nm)	$\Delta x/A_x$ (μm)	ϵ	Reference
Desal-5 DL (GE-Osmonics)	0.5	0.37		[8]
	0.45	2.54		[9]
Desal-5 DK(GE-Osmonics)	0.42–0.44	2.59–2.74		[9]
Desal DK (GE-Osmonics)		1.53–2.99		[2]
		2.76–3.89		[10]
Desal G-5 (GE-Osmonics)	0.84	40.54		[9]
Desal G-10 (GE-Osmonics)	1.3			[11]
Desal G-20 (GE-Osmonics)	1.2			[11]
Desal HL (GE-Osmonics)			33–34–35	[12]
ESNA (Hydranautics)	0.39–0.41–0.43			[13]
ESNA1 (Hydranautics)	0.3			[14]
ESNA1-K1 (Hydranautics)	0.47			[15]
ESNA1-LF (Hydranautics)	0.3			[14]
NF (DOW-Filmtec)	0.43	0.26		[8]
	0.43–0.44	2.47–2.62		[9]
NF 70 (DOW-Filmtec)	0.41–0.44–0.6–0.48			[16]
NF 250 (DOW-Filmtec)			41–41.5–42.4	[4]
NF270 (DOW-Filmtec)	0.43	0.45		[8]
	0.43–0.54–0.65–0.54			[16]

Table 2
Variation range of the model parameters: pore size (r_p), effective porosity ($\Delta x/A_k$), permeability to pure water ($L_{p,w}$), the terms of the charge equation (χ_{dq} and χ_{ds}), and the dielectric constant (ϵ)

	Minimum	Maximum	Reference
r_p (nm)	0.39	0.60	0.49
$\Delta x/A_k$ (μm)	0.33	1.90	1.11
$L_{p,w}$ ($\text{L m}^{-2}\text{h}^{-1}\text{bar}^{-1}$)	8	24	16
χ_{dq}	-0.5	-0.1	-0.3
χ_{ds}	0.9	1.5	1.2
ϵ	33	43	38

(5 and 15 bar). The other operating variables were fixed at the same values used in the control group ($T = 25^\circ\text{C}$, $\text{pH} = 6$, $v = 2\text{ m/s}$). Combining the different levels of total concentration, ion composition, and operating pressure, a total of 36 different cases were obtained (Table 4).

For the control group and each one of the characterization groups, once established the feed composition and the operating conditions, permeate fluxes and ion concentrations were calculated using the MATLAB code for all the parameter sets.

Two, three, four, and five-combinations of the 36 cases were generated without repetition obtaining, respectively 630, 7,140, 58,905, and 376,992 characterization groups.

Fitting performance factors for flux and rejection were defined to evaluate the characterization groups

created under the assumption that the more the variation of the characterization group correlates with that of the control group, the better the prediction of the behavior is expected.

The medium square difference of permeate flux (MSDJ) was defined (Eq. (3)) from the difference between the calculated fluxes obtained using every one of the $\text{NP} = 93$ different parameters sets and the permeate flux value obtained for the reference set of parameters (J_v^o).

$$\text{MSDJ} = \frac{\sqrt{\sum_{n=1}^{\text{NP}} (J_{v,n} - J_v^o)^2}}{N} \tag{3}$$

Then, the fitting performance of permeate flux (FPJ) for a characterization group k was defined as the coefficient of determination between the MSDJ factor calculated for the characterization group and the MSDJ for the control group (MSDJ_{cg}) (Eq. (4)).

$$\text{FPJ}_k = \left(\frac{\text{Cov}(\text{MSDJ}_k, \text{MSDJ}_{cg})}{\sqrt{\text{Cov}(\text{MSDJ}_k, \text{MSDJ}_k) \cdot \text{Cov}(\text{MSDJ}_{cg}, \text{MSDJ}_{cg})}} \right)^2 \tag{4}$$

Seemingly, MSDR (Eq. (5)) is defined as the medium square difference for rejection which is calculated taken into account the differences on rejection of all

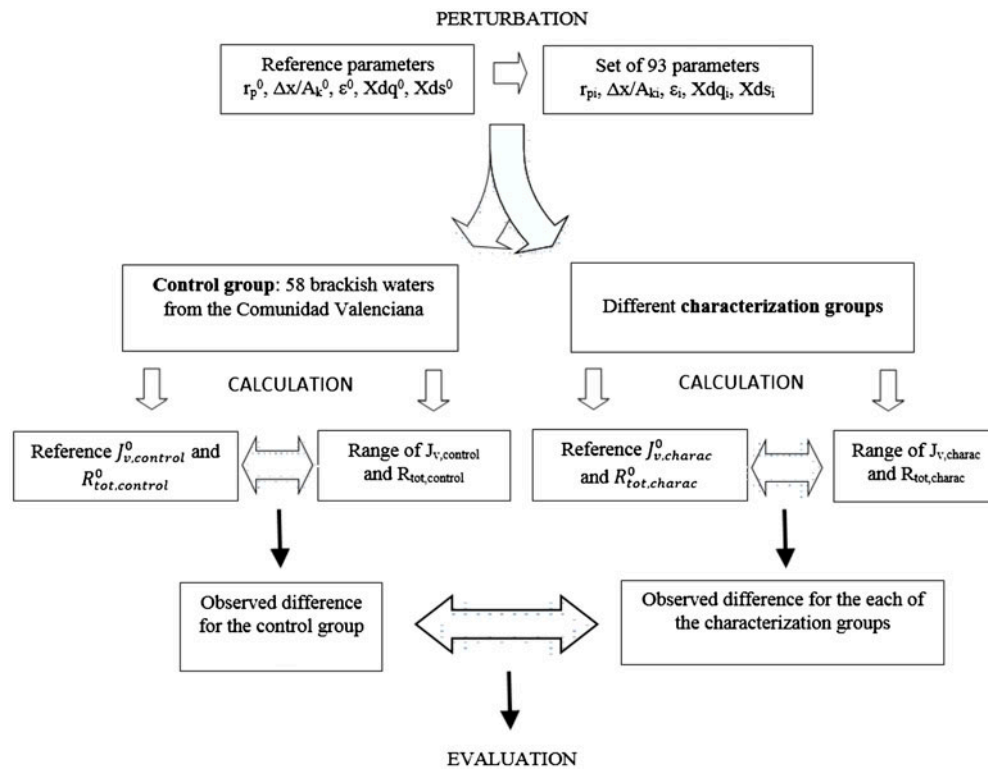


Fig. 1. Schema of the working process to study the correlation within the control group and the characterization groups.

Table 3
Concentration ranges for the selected ions on the control group

	Concentration (mM)				
	Minimum	Maximum	Minimum	Maximum	
Ca ²⁺	1.90	5.01	Cl ⁻	0.44	6.62
Mg ²⁺	0.13	3.74	NO ₃ ⁻	0.83	1.60
Na ⁺	0.44	6.43	HCO ₃ ⁻	1.83	6.83
K ⁺	0.02	0.13	SO ₄ ²⁻	0.54	4.76
			CO ₃ ²⁻	0.02	0.11

NC components using the random parameter sets and the reference parameter set (R_i^0). The fitting performance (FPR) for rejection is also defined from the coefficient of determination between the MSDR factor calculated for each characterization group and that for the control group (MSDR_{cg}) (Eq. (6)).

$$\text{MSDR}_k = \frac{\sqrt{\sum_{n=1}^{\text{NP}} \sum_{i=1}^{\text{NC}} (R_{i,n} - R_i^0)^2}}{N} \quad (5)$$

$$\text{FPR}_k = \left(\frac{\text{Cov}(\text{MSDR}_k, \text{MSDR}_{\text{cg}})}{\sqrt{\text{Cov}(\text{MSDR}_k, \text{MSDR}_k) \cdot \text{Cov}(\text{MSDR}_{\text{cg}}, \text{MSDR}_{\text{cg}})}} \right)^2 \quad (6)$$

2.3. Experimental methodology

2.3.1. Experimental setup for NF experiments

The NF experiments were carried out in the pilot plant presented in Fig. 2 which was equipped with the polymeric membrane ESNA1-LF2, provided by Hydranautics, displayed in a flat module with an effective area of 37.84 cm². Both permeate and retentate streams were recirculated into the feed tank in order to keep a constant feed concentration. Applied pressure was fixed with two valves and controlled with three manometers: upstream, downstream, and on the membrane module.

Feed solutions were prepared with deionized water and pure grade salts, fixing its temperature at

Table 4
Cases defined to build the characterization groups

Case	C_T (mN)	P (bar)	$X_{Mg^{2+}}$	X_{Na^+}	$X_{SO_4^{2-}}$	X_{Cl^-}	Case	C_T (mN)	P (bar)	$X_{Mg^{2+}}$	X_{Na^+}	$X_{SO_4^{2-}}$	X_{Cl^-}
1	13	5	0	1	1	0	19	42	5	0	1	1	0
2	13	5	0	1	0.5	0.5	20	42	5	0	1	0.5	0.5
3	13	5	0	1	0	1	21	42	5	0	1	0	1
4	13	5	0.5	0.5	1	0	22	42	5	0.5	0.5	1	0
5	13	5	0.5	0.5	0.5	0.5	23	42	5	0.5	0.5	0.5	0.5
6	13	5	0.5	0.5	0	1	24	42	5	0.5	0.5	0	1
7	13	5	1	0	1	0	25	42	5	1	0	1	0
8	13	5	1	0	0.5	0.5	26	42	5	1	0	0.5	0.5
9	13	5	1	0	0	1	27	42	5	1	0	0	1
10	13	15	0	1	1	0	28	42	15	0	1	1	0
11	13	15	0	1	0.5	0.5	29	42	15	0	1	0.5	0.5
12	13	15	0	1	0	1	30	42	15	0	1	0	1
13	13	15	0.5	0.5	1	0	31	42	15	0.5	0.5	1	0
14	13	15	0.5	0.5	0.5	0.5	32	42	15	0.5	0.5	0.5	0.5
15	13	15	0.5	0.5	0	1	33	42	15	0.5	0.5	0	1
16	13	15	1	0	1	0	34	42	15	1	0	1	0
17	13	15	1	0	0.5	0.5	35	42	15	1	0	0.5	0.5
18	13	15	1	0	0	1	36	42	15	1	0	0	1

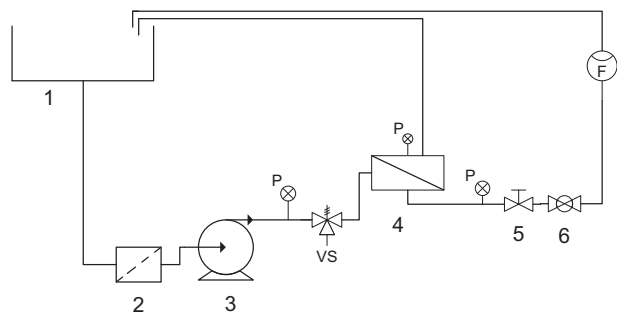


Fig. 2. Experimental NF setup. (1) Feed tank, (2) filter, (3) pump, (4) membrane module, (5) and (6) valves.

25°C with a heat exchanger/refrigerator. The pH of the solution was set at a value of 6, adding NaOH or HCl if necessary. The effect of concentration polarization was reduced using a turbulence promoter in the membrane feed side and by setting the cross-flow velocity at 2 m/s.

2.3.2. Rejection experiments

Different feed compositions of different complexity were tested: solutions of single salts, and mixtures of two and three salts. As single-salt experiments, the rejection of NaCl, NaNO₃, Na₂SO₄, CaCl₂, Ca(NO₃)₂, MgCl₂, Mg(NO₃)₂, and MgSO₄ was studied. Total concentration of 10, 25, 40, 55, and 70 mN was tested at pressures of 5 and 10 bar.

Binary salt mixtures with three different ions were also fed onto the membrane with combinations of the

salts used in the single-salt experiences except the calcium salts. Equinormal compositions were set for the cations with the experiments with a common anion and vice versa. Two levels of total concentration of 40 and 70 mN were tested at 5 and 10 bar.

For ternary salts mixtures, only the cases with one cation and the three anions were experimentally tested with a total concentration of 40 and 70 mN for the cation and equinormal composition for the anions at the effective pressures of 5 and 10 bar.

A validation case with a mixture of all the ions was used to evaluate the validity of the model. A feed solution with a total concentration of 50 mN was prepared with the following composition expressed as percentage of equivalents: 20% NaCl, 30% NaNO₃, and 50% MgSO₄. Five levels of applied pressure were studied: 5, 7, 9.5, 12, and 13 bar. All the experiences are summarized in Table 5.

The experiment was performed until stabilization of permeate flux and conductometric measures was observed. Complete ion analyses were performed for feed and permeate by ion chromatography.

3. Results and discussion

3.1. Evaluation of the characterization groups obtained with simulation

Characterization groups formed by two, three, four, and five cases were built from the single cases shown in Table 4 and calculated for all parameter sets.

Table 5

Summary of the salts, equivalent fractions of each salt (x_i), total concentration (C_T), and effective pressure for the experimental experiences

	Salts	$x_1-x_2-x_3$	C_T (mN)	P (bar)
Single salts	NaCl		10	5
	NaNO ₃		25	10
	Na ₂ SO ₄		40	
	MgCl ₂		55	
	Mg(NO ₃) ₂		70	
	MgSO ₄			
	CaCl ₂			
	Ca(NO ₃) ₂			
Binary mixtures (common cation)	NaCl–NaNO ₃	0.5–0.5	40	5
	NaCl–Na ₂ SO ₄		70	10
	NaNO ₃ –Na ₂ SO ₄			
	MgCl ₂ –Mg(NO ₃) ₂			
	MgCl ₂ –MgSO ₄			
	Mg(NO ₃) ₂ –MgSO ₄			
Binary mixtures (common anion)	NaCl–MgCl ₂	0.5–0.5	40	5
	NaNO ₃ –Mg(NO ₃) ₂		70	10
	Na ₂ SO ₄ –MgSO ₄			
Ternary mixtures (common cation)	NaCl–NaNO ₃ –Na ₂ SO ₄	0.33–0.33–0.33	40	5
	MgCl ₂ –Mg(NO ₃) ₂ –MgSO ₄		70	10
Validation case	NaCl–NaNO ₃ –MgSO ₄	0.2–0.3–0.5	50	5 ^a
				7 ^a
				9.5 ^a
				12 ^a
				13 ^a

^aApplied pressure.

Table 6

Characterization groups with the higher and lower fitting performance factors for rejection (FPR) and their performance factors for permeate flux (FPJ)

Number of cases	Cases	FPR	FPJ	Number of cases	Cases	FPR	FPJ
2	11 36	0.846	0.9998	2	16 23	0.089	0.9829
3	11 19 36	0.886	0.9986	3	16 23 34	0.089	0.9926
4	10 11 19 36	0.892	0.9994	4	7 16 23 34	0.092	0.9959
5	4 11 19 35 36	0.898	0.9995	5	7 16 23 25 34	0.095	0.9975

The fitting performance factor for permeate flux (FPJ) showed good values near to 1 in all simulated cases. FPJ was over 0.99 in 69% of the characterization groups and over 0.80 in the 100% of the cases. Combination of cases with FPJ values smaller than 0.99 were discarded for the posterior study.

The fitting performance for rejection results showed that good grades of fitting performance for

rejection (FPR near to 1) can be achieved even for combinations using a low number of cases. For all groups, the FPR values fell between 0.85 and 0.90. As an example, Fig. 3 shows the FPR values for the characterization groups formed by the 4,937 selected three-cases combinations which had FPJ values greater than 0.99. The observed distribution of the FPR was similar in all cases, regardless the size of the group used for

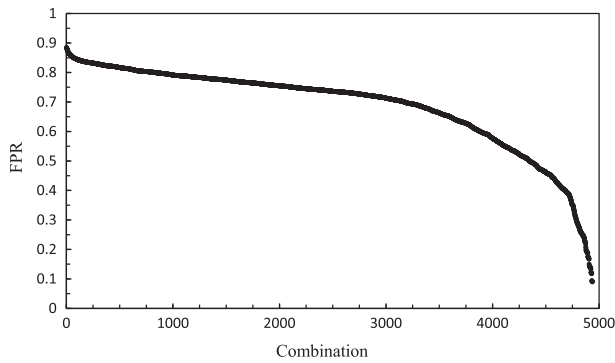


Fig. 3. Fitting performance values for rejection (FPR) for the three-cases combinations with fitting performance for permeate flux (FPJ) > 0.99.

the calculation. This may suggest that there are some combinations of cases offering better information in the prediction of the control group. According to the results, total rejection was chosen as the decision variable upon which to study the grade of correlation

between the control group and the characterization groups. The best characterization groups corresponding to high FPR values are shown in Table 6. It is remarkable that the same single cases are repeated in almost all the groups, so analyzing their feed composition and operating conditions determines the best experimental conditions to have a good knowledge of the NF behavior of the control group. To make possible a comparison, the groups with lower FPR values for the two, three, four, and five combinations were selected too and shown in Table 6.

The characteristics of the cases forming part of these groups that lead to the best and worst correlation can be seen in Table 4. The principal difference between them is the chosen salts for each group. It is noted that the groups where MgSO₄ forms part of the feed had lower FPR and Na₂SO₄ seems to be the better choice among the sulfate salts. It is also remarkable that some characterization sets with only two single salts also showed good correlation.

The lognormal distribution fitted well the values of the difference (1–FPR) (Table 7). Fig. 4 shows the

Table 7
Log-normal distribution of the difference (1–FPR)

Number of cases	Mean value	Variance	μ	σ	Standard error (μ)	Standard error (σ)
2	0.36	0.022	-1.09	0.40	$1.6 \cdot 10^{-2}$	$1.1 \cdot 10^{-2}$
3	0.31	0.013	-1.22	0.36	$4.2 \cdot 10^{-3}$	$3.0 \cdot 10^{-3}$
4	0.29	0.008	-1.30	0.32	$1.3 \cdot 10^{-3}$	$9.3 \cdot 10^{-4}$
5	0.28	0.006	-1.36	0.28	$4.6 \cdot 10^{-4}$	$3.3 \cdot 10^{-4}$

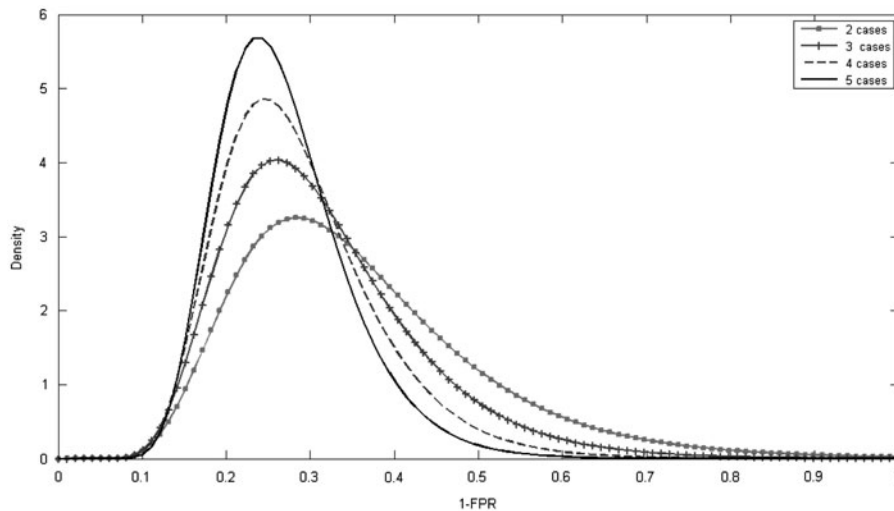


Fig. 4. Probability density function for (1–FPR) corresponding to characterization groups formed with combinations of two, three, four, and five cases.

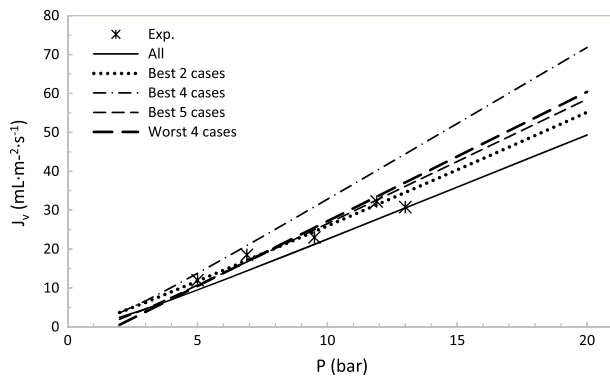


Fig. 5. Permeate flux for the validation case obtained experimentally and calculated with different model groups.

results for each model group with combinations of two, three, four, and five cases. According to this distribution 0.12% of the two- and three-cases combination groups, 0.08 and 0.04% of the four- and five-cases characterization groups, respectively, showed values of FPR greater than 0.9.

3.2. Experimental validation of the characterization groups

To check the previous results obtained with simulation, the DSPM-DE model was fitted with the optimal characterization groups obtained from the simulation study and, then, the flux and total rejection for the validation case were calculated with these parameters. A case with a low-correlation index was performed in order to know if there were differences between the results obtained by fitting with an optimum characterization group and with a bad

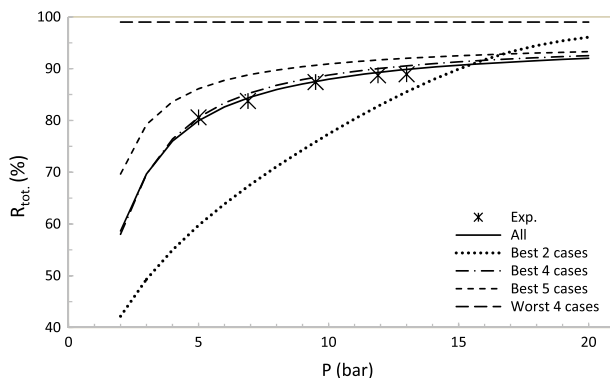


Fig. 6. Total rejection for the validation case obtained experimentally and calculated with different model groups.

combination of cases. As there was more experimental data available (Table 5), the model was also fitted with all the experimental cases (127) in order to know if the hypothesis that a good prediction of the NF behavior can be achieved with a reduced number of experiments was true. In Figs. 5 and 6, prediction of both the permeate flux and the total rejection with different groups of experiments is shown.

It can be observed that a high number of experiments are not necessary to achieve an effective prediction, as with the four- and five-cases characterization group, the prediction for the total rejection is as good as the obtained with the total of the experimental cases.

Moreover, it could be noticed that the presented procedure to select the best characterization groups is a good way to discriminate between the operating conditions as there are remarkable differences between the obtained results with the optimal conditions and the worst groups.

The best results for the total rejection prediction do not agree with those for the permeate flux as the group selection was optimized for the total rejection variable. A future improvement for the selection procedure could be the simultaneous optimization of both variables.

4. Conclusions

A huge number of simulations based on the comparison of different characterization groups with a control group of groundwaters could be generated using a program based on the DSPM-DE. These results allowed to define performance factors for flux and rejection. Fitting performance of flux was good for almost all characterization groups, but a small fraction of the characterization groups yielded higher fitting performance of rejection respect to the remaining groups. These characterization sets should be the preferred ones to be carried out when direct fitting from experiments is going to be performed.

The selected characterization groups were experimentally tested. The model fitted from these experiments resulted in a good prediction of a validation case. For the validation case used, a characterization group of four selected experiments was able to achieve a good fitting, not being observed substantially improvement by augmenting the number of experiments.

Therefore, it can be concluded that the present procedure is appropriate to determine the best experiments for a direct fitting of the DSPM-DE model.

Acknowledgments

This work was supported by the Ministry for Economy and Competitiveness [CTM2010-20248 (Project OPTIMEM)], [BES-2011-049230].

Symbols

Latin

C_T	—	total feed composition, mN
FPJ	—	fitting performance factor for permeate flux of a characterization group
FPR	—	rejection performance factor for rejection of a characterization group
$L_{p,w}$	—	membrane permeability to pure water, $\text{L m}^{-2} \text{h}^{-1} \text{bar}^{-1}$
NC	—	number of ions type in solution
NR	—	number of random parameter sets generated using the Monte Carlo method
R	—	Rejection, %
r_p	—	pore size of the membrane, nm
v	—	cross-flow velocity, m/s
x	—	fraction of equivalents
T	—	feed temperature, °C

Greek symbols

$\Delta x/A_k$	—	ratio of membrane thickness to effective porosity, μm
ε	—	dielectric constant of the membrane
μ	—	dynamic viscosity, Pa s
χ_d	—	membrane charge density, Eq mol^{-1}
χ_{dq}	—	coefficient of potential correlation for membrane charge density, Eq mol^{-1}
χ_{ds}	—	exponent of potential correlation for membrane charge density

Subscripts

exp	—	experimental
i	—	ion component
cg	—	control group
k	—	characterization group
n	—	Monte Carlo set
tot	—	total
val	—	validation

Superscripts

*	—	reference value
---	---	-----------------

References

- [1] W.R. Bowen, H. Mukhtar, Characterisation and prediction of separation performance of nanofiltration membranes, *J. Membr. Sci.* 112 (1996) 263–274.
- [2] W.R. Bowen, J.S. Welfoot, Modelling the performance of membrane nanofiltration—Critical assessment and model development, *Chem. Eng. Sci.* 57 (2002) 1121–1137.
- [3] J.A. Otero, O. Mazarrasa, J. Villasante, V. Silva, P. Prádanos, J.I. Calvo, A. Hernández, Three independent ways to obtain information on pore size distributions of nanofiltration membranes, *J. Membr. Sci.* 309 (2008) 17–27.
- [4] N.S. Kotrappanavar, A.A. Hussain, M.E.E. Abashar, I.S. Al-Mutaz, T.M. Aminabhavi, M.N. Nadagouda, Prediction of physical properties of nanofiltration membranes for neutral and charged solutes, *Desalination* 280 (2011) 174–182.
- [5] J. Straatsma, G. Bargeman, H.C. Van der Horst, J.A. Wesselingh, Can nanofiltration be fully predicted by a model? *J. Membr. Sci.* 198 (2002) 273–284.
- [6] Instituto Geológico y Minero de España (Geological and Mining Institute of Spain), Sistema de información del agua subterránea (Information system for groundwater), 2014. Available from: www.igme.es.
- [7] S. Wilks, Determination of sample sizes for setting tolerance limits, *Ann. Math. Stat.* 12 (1941) 91–96.
- [8] J. Luo, Y. Wan, Effect of highly concentrated salt on retention of organic solutes by nanofiltration polymeric membranes, *J. Membr. Sci.* 372 (2011) 145–153.
- [9] G. Bargeman, J.M. Vollenbroek, J. Straatsma, C.G.P.H. Schroën, R.M. Boom, Nanofiltration of multi-component feeds. Interactions between neutral and charged components and their effect on retention, *J. Membr. Sci.* 247 (2005) 11–20.
- [10] A.I. Cavaco Morão, A. Szymczyk, P. Fievet, A.M. Brites Alves, Modelling the separation by nanofiltration of a multi-ionic solution relevant to an industrial process, *J. Membr. Sci.* 322 (2008) 320–330.
- [11] M. Diná-Afonso, G. Hagemeyer, R. Gimbel, Streaming potential measurements to assess the variation of nanofiltration membranes surface charge with the concentration of salt solutions, *Sep. Purif. Technol.* 22–23 (2001) 529–541.
- [12] A.A. Hussain, S.K. Nataraj, M.E.E. Abashar, I.S. Al-Mutaz, T.M. Aminabhavi, Prediction of physical properties of nanofiltration membranes using experimental and theoretical models, *J. Membr. Sci.* 310 (2008) 321–336.
- [13] N.C. Nguyen, S.-S. Chen, H.-T. Hsu, C.-W. Li, Separation of three divalent cations (Cu^{2+} , Co^{2+} and Ni^{2+}) by NF membranes from pHs 3 to 5, *Desalination* 328 (2013) 51–57.
- [14] D.-X. Wang, X.-L. Wang, Y. Tomi, M. Ando, T. Shintani, Modeling the separation performance of nanofiltration membranes for the mixed salts solution, *J. Membr. Sci.* 280 (2006) 734–743.
- [15] D. Nanda, K.-L. Tung, C.-C. Hsiung, C.-J. Chuang, R.-C. Ruaan, Y.-C. Chiang, C.-S. Chen, T.-H. Wu, Effect of solution chemistry on water softening using charged nanofiltration membranes, *Desalination* 234 (2008) 344–353.
- [16] Y.-L. Lin, P.-C. Chiang, E.-E. Chang, Removal of small trihalomethane precursors from aqueous solution by nanofiltration, *J. Hazard. Mater.* 146 (2007) 20–29.